



Professional Communication Products

*** Amaturer**

*** Citizenband**

*** Cellular**

*** GPS**

*** Hi-Frequency**

This image shows a full page of blank white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page, providing a template for writing or drawing. There are no margins, text, or other markings on the paper.



209 West Grant Street

PO Box 149

Onarga, IL 60955

(815) 268-4303

877-331-5161

Fax (815) 268-4313

www.procommproducts.com

INDEX

Citizen Band Performance Antennas.....	2
Citizen Band No Ground Antennas.....	3
Citizen Band Base Load Antennas.....	4-5
Citizen Band Top Load Fiberglass Antennas.....	6
Citizen Band Fiberglass Antenna Kits.....	7
Citizen Band Base Station Antenna.....	8
Citizen Band CB Glass Mount/AM FM Antenna Kits.....	9
Mobile TV Antennas.....	10
Mobile TV Accessories.....	11
Scanner Antennas and Kits.....	12
Antenna Mounts and Cable Adapters.....	13
Aluminum Mounts/Stainless Steel Mounts	14-15
Antenna/Radio Mount Accessories.....	16
Radio Accessories/Connectors.....	17
Cable Assemblies.....	18
Bulk Coax.....	19
Amateur Antennas.....	20-21
Amateur Antenna Kits.....	21
Microphones and Speakers.....	22
Cellular Dual Band Antennas.....	23
Cellular Glass Mount Antennas.....	24
Cellular Glass Mount Accessories.....	25
Cellular Magnet Mount Antennas.....	26
Cellular Surface Mount Antennas.....	27
Cellular Window Clip Antennas.....	28
Cellular Mount Accessories.....	28
Connectors.....	29-30



INTRUDER

Hi-Power Performance Antenna

- 10,000 Watt Rated
- 3" Outside Diameter Coil
- Lightweight **Aircraft Aluminum**
- Durable Oversize Stainless Steel Whip- 48" .200 Diameter
- Ultra Broad Band Performance
- Field Tunable
- 5'6" Total Height
- Available in Polished Aluminum and Multiple Colors



Model No.

MM490—Polished Aluminum

BK490—Black

BL490—Blue

PU490—Purple

RD490—Florescent Red

Replacement Parts

MM490WT— 48" Tapered Whip

MM490WS— Screws for Whip Ferrule



CHIMP

Open Coil Performance Antenna

- 5000 Watt Rated
- Lightweight **Aircraft Aluminum**
- Durable Oversize Stainless Steel Whip
- 36" .125 Outside Diameter Stainless Steel Whip
- Ultra Broad Band Performance
- Field Tunable
- 48" Total Height
- Available in Black (BK) and Polished Aluminum Finish



Model No.

CH58—Polished Aluminum

CH58BK—Black Anodized

Replacement Parts

RW-CH58- Whip

WS-CH58- Screws

DOMINATOR

- 10,000 Watt Power Handling Capability
- Ultra Broad Bandwidth 10 & 11 Meter Frequency
- Heavy Duty Double Coil Design for Demanding Applications
- 36" 17-7 Quality Stainless Steel Whip
- Available in Chrome or Black Chrome Finish
- Total Height 66"



Model No.

T215—Chrome

T215B— Black



DINGO CB- No Ground Fiberglass Antenna Kit

- 5/16" Fiberglass Tunable Tip Antenna
- **Stainless Steel Mirror Mount for Durability and Long Life**
- Patented Chrome Dome Cable Connection
- 17' High Quality Low Loss RG58 Coax with Molded PL259 Connector
- 500 Watt Rated
- Kits Available with 3' or 4' Antenna Length
- Available in Black (BK), White (W), or Red (R)

Model No.

CB-NG3—3' Kits

CB-NG4—4' Kits

Made in the USA



DINGO II CB - No Ground

Window Clip Antenna Kit

- 24" Mini Base Load Antenna
- Aluminum Window Clip Mount
- Patented Chrome Dome Connector
- 17' High Quality Belden Coax Cable
- Available in Black or White

Model No.

CB-NGWC17

Made in the USA



GROUND ZERO II CB - No Ground

Fiberglass Antenna

- 1/2 Wave Voltage Fed Antenna, No Ground Required
- Will Work on Fiberglass Vehicles, Boats, RV's and Even Motorcycles
- 10-11 Meter Range, Overall Length 48"
- Slide Tuning for Low SWR and Sideband Use
- 3/8"x24 Thread Mounting
- SO239 Connector

Model No.

G23—3'

G24—4'

Made in the USA





IMPULSE Base Load Tunable CB Antenna

- Innovative Tunable Base Load CB Antenna
- Field Tunable for Lowest SWR
- Rated 350 Watts
- 17-7 Stainless Steel Whip
- Fits Standard 3/8-24 Mounts
- Factory Tested and Tuned

Model No
IMP3000 - 30"
IMP4000 - 40"
Made in the USA



Kits Available:

Magnet Mount

- 3" Heavy Duty Chrome Plated Magnet Mount
- Patented Chrome Dome Termination
- 12' RG58 Cable with PL259's
- Impulse Antenna

Model No
IMP3000M
IMP4000M

Mirror Mount

- Heavy Duty 3-Way Mirror Mount w/ SO239 Connector
- 12' RG58 Cable with PL259's
- Impulse Antenna

Model No
IMP3000MM
IMP4000MM



KWIK TUNE Base Load Tunable CB Antenna

- Base Loaded Antenna Pre-Tuned for 27 MHz
- Unique High Performance Design for a Low SWR
- Field Tunable, No Cutting - Adjust Rings for Superior Performance
- Chrome Plated 3/8-24 Threaded Base

Model No
JBC800- 8"
JBC2400-24"
JBC3600-36"
JBC4800-48"



Kits Available:

Magnet Mount

- 3" Heavy Duty Chrome Plated Magnet Mount
- Patented Chrome Dome Termination
- 12' RG58 Cable with PL259's
- Kwik Tune Antenna

Model No
JBC112-08
JBC112-24
JBC112-36
JBC112-48

Truck Lip Mount

- Heavy Duty Truck Lip Mount
- 15 RG58 Cable with PL259's
- Kwik Tune Antenna

Model No
JBC105-8
JBC105-24
JBC105-36
JBC105-48



HALF-N-HALF Base Loaded 1/4 Wave Antenna

- 5/16" Diameter Fiberglass Base with 16 Gauge Copper Wire
- 17-7 .100 Diameter Stainless Steel Whip
- Adjustable Stainless Steel Whip can be Raised or Lowered for Superior SWR
- Chrome Plated 3/8-24 Threaded Base
- Available in Black or White

Model No
JBC1300-36"
JBC1400-48"
JBC1500-60"

MONSTER Base Load Half-N-Half Antenna

- 3500 Watt Rated
- Base Loaded Quarter Wave Antenna
- Massive 1/2" Fiberglass Base with High Power 14 Gauge Copper Wire
- 17-7 1/8" Diameter Stainless Steel Whip
- Oversized Chrome Plated Ferrules
- 3/8- 24 Stainless Steel Mounting Screw
- Tunable for Optimum SWR
- Available in Black Only


Model No
MBL-3B- 36"
MBL-4B- 48"



103 SERIES

Heavy Duty CB Magnet Mounts

- 36" Base Loaded Antenna
- Powerful 3" Magnet with Protective Base
- Unique Design: Base Load May Be Removed from Magnet
- 17' Pre-Wired RG58 Cable to PL259 Connector
- JBC103S Includes Heavy Duty Spring
- Rated 75 Watts

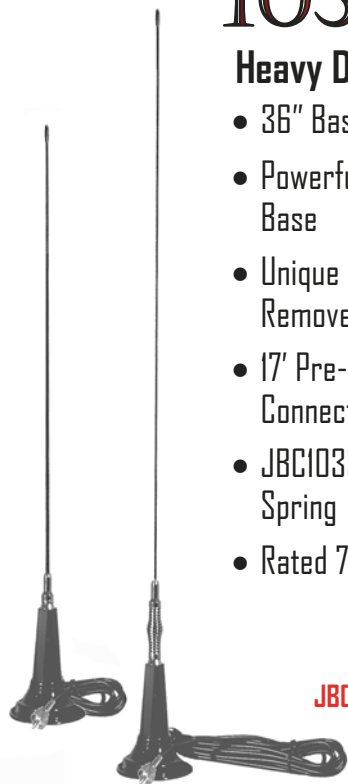

Model No.

JBC103 - 36"

JBC103S - with Shock Spring

Replacement Whips

103

103S

101

Magnet Mount Antenna

- 9" Super Flexible CB Antenna
- Powerful 3" Magnet with Protective Base
- 10' Low Loss RG58 Cable w/PL259 Connector
- Weatherproof Encapsulated Connections
- Rated 25 Watts




Model No.

JBC101

270

CB-Low Profile Magnet Mount

- 15" Low Profile Fiberglass CB Antenna
- **Base Tunable**
- Powerful 3" Magnet
- 12' High Quality RG58 Cable with PL259 Connector
- 75 Watt Rated

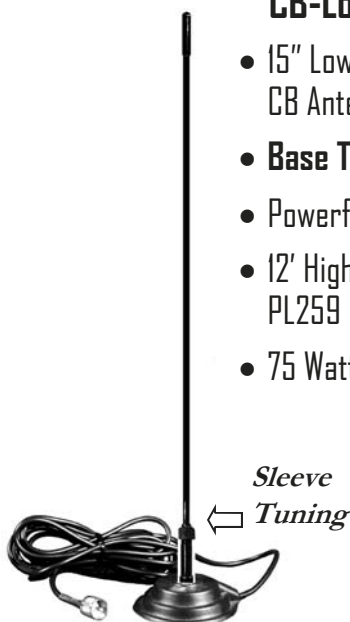

Model No.

C8270

Made in the USA

Sleeve
Tuning

150

Heavy Duty Rubber Duck Antenna

- Virtually Unbreakable Conductive Rubber CB Antenna
- Flexible and Tough; Great for High Stress Areas
- 14 1/2" Total Height
- Easy Tuning with **Base Tuning Ring** Design
- Standard 3/8" x 24 Ferrule



Model No.

150

Antenna Only

150M -
Kit Includes 3" Heavy Duty Chrome Dome Magnet Mount, 12' RG58AU Coax and Molded PL259 Connector

Ring
Tuning



FR SERIES

5/16" Composite Wound Fiberglass Whips

300 Watt Rated

- Internal Helically Wound Fiberglass Antenna
- Contains Linear Load 22 Ga. Wire
- 5/16" Fiberglass with 3/8"x24 Ferrule
- 3' or 4'
- Black or White Finish

Model No

FR3 - 36"

FR4 - 48"

Made in the USA



BULL DOG

5/16" Fiberglass Whips

750 Watt Rated

- Top Loaded 1/4 Wave Helically Wound Antenna
- 20 Gauge Copper Wire
- Factory Tuned - Field Adjustable
- Available in Black (B), White (W), Red (R), Black/Gold (BG), White Gold (WG) or Red, White and Blue

Model No

JBC200 - 24"

JBC300 - 36"

JBC400 - 48"



301RWB-Red, White & Blue 36"

401RWB-Red, White & Blue 48"

Made in the USA

SUPER DOG

1/4" Flexi-Whips

500 Watt Rated



Top Loaded 1/4 Wave Helically Wound Antenna

- 22 Gauge Copper Wire
- Factory Tuned - Field Adjustable
- Available in Black (B), White (W), Red (R), Black/Gold (BG), White Gold (WG)

Model No

JBCF200 - 24"

JBCF300 - 36"

JBCF400 - 48"

Made in the USA



BIG DOG

3/8" Fiberglass Whips

1000 Watt Rated

- Top Loaded 1/4 Wave Helically Wound Antenna
- Heavy Duty 3/8" Diameter Solid Fiberglass
- 18 Gauge Copper Wire
- Factory Tuned - Field Adjustable
- Available in Black (B), White (W), Red (R), Black/Gold (BG), White Gold (WG)

Model No

JBC200-I - 24"

JBC300-I - 36"

JBC400-I - 48"

Made in the USA

WEATHER WATCH FIBERGLASS ANTENNAS

5/16" Solid Fiberglass CB

Antenna with Weather Trap

- Top Loaded 1/4 Wave Helically Wound Antenna
- 16 Gauge Copper Wire
- 1000 Watt Rated
- Factory Tuned - Field Adjustable
- Available in Black, White, Red, Black/Gold, White Gold

Model No

JBCW200 - 24"

JBCW300 - 36"

JBCW400-48"

Made in the USA



1/4" Flexible Fiberglass CB

Antenna with Weather Trap

- Flexes Nearly 360°
- Top Loaded 1/4 Wave Helically Wound
- 22 Gauge Copper Wire
- 500 Watt Rated
- Available in Black, White, Red,

Model No

JBCFW300 - 36"

JBCFW400 - 48"

*Made in the USA

New BULLDOG TUNABLE TIP ANTENNA WITH WEATHERBAND

5/16" Fiberglass Whips
750 Watt Rated

- Top Loaded 1/4 Wave Helically Wound Antenna with Tunable Tip
- 20 Gauge Copper Wound Wire
- .100 dia. 17-7 Stainless Steel Tunable Tip
- Factory Tuned - Field Adjustable
- Available in Black (B), or White (W).
- Available in 3' or 4' only

Model No

WT300-36"

WT400-48"

Made in the USA

New BIG DOG TUNABLE TIP ANTENNA

3/8" Fiberglass Whips
1000 Watt Rated

- Top Loaded 1/4 Wave Helically Wound Antenna
- Heavy Duty 3/8" Diameter Solid Fiberglass
- 18 Gauge Copper Wire
- Factory Tuned - Field Adjustable
- Available in Black (B), or White (W)

Model No

T200-1 - 24"

T300-1 - 36"

T400-1 - 48"

T500-1 - 60"

Made in the USA



Citizen
Band

Fiberglass
Antenna Kits

FR SERIES Standard

- 3-Way Aluminum Mirror Mount with Heavy Duty Chrome Plated SD-239
- 9' Low Loss RG-58 or RG-59 Coax with Molded PL2589 Connectors- Soldered Connection

Model No

Singles

HSS995-FR3

HSS995-FR4

Duals

HSD995-FR3

HSD995-FR4

Terminator Series

- Patented Terminator Stud Connector
- 3-Way Deluxe Aluminum Mirror Mount
- 18' Low Loss RG58 or RG59 Coax and Molded PL259 with Teflon Dielectric

Model No

Singles

TS991-FR3

TS991-FR4

Duals

TD991-FR3

TD991-FR4

FME Series

- 3-Way Aluminum Mirror Mount with Heavy Duty FME Stud
- 9' Low Loss RG58 or RG59 Coax with Slimline Nipple Connector to Molded UHF Connector

Model No

Singles

TS996-FR3

TS996-FR4

Duals

TD996-FR3

TD996-FR4

Kits Available: SUPER DOG Standard

- 3-Way Aluminum Mirror Mount with Heavy Duty Chrome Plated SD-239
- 9' Low Loss RG-58 or RG-59 Coax with Molded PL2589 Connectors- Soldered Connection

Model No

Singles

HSS995-F2

HSS995-F3

HSS995-F4

Duals

HSD995-F2

HSD995-F3

HSD995-F4

Terminator Series

- Patented Terminator Stud Connector
- 3-Way Deluxe Aluminum Mirror Mount
- 18' Low Loss RG58 or RG59 Coax and Molded PL259 with Teflon Dielectric

Model No

Singles

TS991-F2

TS991-F3

TS991-F4

Duals

TD991-F2

TD991-F3

TD991-F4

FME Series

- 3-Way Aluminum Mirror Mount with Heavy Duty FME Stud
- 9' Low Loss RG58 or RG59 Coax with Slimline Nipple Connector to Molded UHF Connector

Model No

Singles

TS996-F2

TS996-F3

TS996-F4

Duals

TD996-F2

TD996-F3

TD996-F4

BULL DOG Standard

- 3-Way Aluminum Mirror Mount with Heavy Duty Chrome Plated SD-239
- 9' Low Loss RG-58 or RG-59 Coax with Molded PL2589 Connectors- Soldered Connection

Model No

Singles

HSS995-2

HSS995-3

HSS995-4

Duals

HSD995-2

HSD995-3

HSD995-4

Terminator Series

- Patented Terminator Stud Connector
- 3-Way Deluxe Aluminum Mirror Mount
- 18' Low Loss RG58 or RG59 Coax and Molded PL259 with Teflon Dielectric

Model No

Singles

TS991-2

TS991-3

TS991-4

Duals

TD991-2

TD991-3

TD991-4

FME Series

- 3-Way Aluminum Mirror Mount with Heavy Duty FME Stud
- 9' Low Loss RG58 or RG59 Coax with Slimline Nipple Connector to Molded UHF Connector

Model No

Singles

TS996-2

TS996-3

TS996-4


Duals

TD996-2

TD996-3

TD996-4

*Add (B) for Black, (W) for White, (BG) for Black/Gold
(WG) for White/Gold and (R) for Red*



PATRIOT

CB Base Station Antenna

- **Now With Tuning Rings!!**
- Two -Section Omni Directional 1/2 Wave CB Base Station
- Threaded Tuning
- 2000 Watt P.E.P
- 10-12 Meter
- Rugged Fiberglass Construction with Chrome Plated Fer-
rules
- Single Coil Circuit for Optimum Tuning and Reliability
- Includes Mounting Hardware
- Extremely Easy to Install and Operate
- UPS Shippable; **12** per case

Model No.

PAT-12

Made In The USA



PATRIOT

GROUND PLANE KIT



- Improves Performance by 30%
- Installs at the Base of the PAT-12
- Includes 4 -6 Foot Long Fiberglass Radials with Aluminum
Mounting Hub
- UPS Shippable; **12** per case

Model No.

PAT-12GPK

Made In The USA

STAINLESS STEEL STINGERS

- Quality Stainless Steel Rod
- Length: 24"-52"
- Diameter: .100 or .125

All Stingers Come with Coronas

.100 Diam.

30SS-T-30"

32SS-T-32"

40SS-T-40"

42SS-T-42"

48SS-T-48"

52SS-T-52"

.125 Diam.

36/125SS-T-36"

48/125SS-T-48"

Custom Lengths Available
Chrome Plated Brass Bases

Model No

CB52- Base for .100 Rod

CB55- Base for .125 Rod



CLASSIC STAINLESS STEEL WHIPS

- 102" 17-7 Stainless Steel Element
- Chrome Plated 3/8-24 Threaded Base

Model No

JBC1020-Whip w/Heavy Duty Double Set Screw
Removable Ferrule

JBC1020C-Whip w/Permanent Pressed on Base
and Weather Seal O-Ring
Made In The USA

Replacement Parts

102SS-T-Whip w/Tip only

B102-Removable Base Ferrule w/Double Set
Screws

GLASS MOUNT

VECTOR

High Performance On-Glass CB Antenna

- New Tuning Collar makes tuning easier than ever!
- Optimized Removable 1/2 Wave Fiberglass Whip
- Easy Installation
- 16' RG58U Low Loss Cable with Soldered PL259
- 50 Watt Rated

Model No

VCBGM

Made in the USA

Replacement Parts Available

VCB-MF Mast and Foot

RMT-KT Remount Kit



STANDARD ON-GLASS CB ANTENNA KIT

- 22" Collinear Antenna
- Center Load Encapsulated in Flexible Plastic
- Easy Installation
- Freq: 25-30 MHz
- Low SWR (2.0 or Less) 15' RG58U Coax with PL-259 Connector

Model No

CBGM



AM/FM ANTENNAS

AM/FM On-Glass Antenna Kit

- 21" AM/FM On-Glass Antenna Kit
- 17-7 Stainless Steel Coil Antenna
- 15" Coax Cable with Motorola Plug

Model No

PC-GMFM



AM/FM Horizontal Mirror Mount Kit

- 30" Stainless Steel Antenna
- Horizontal Mirror Mount with Chrome Plated SO239
- 9' RG58AU Coaxial Cable with Molded PL-259 to Motorola Plug

Model No

JBC332-FM



AM/FM Mirror Mount Kit

- 30" Stainless Steel Antenna
- Heavy Duty Slimline Mirror Mount with Chrome Plated SO239
- 9' RG58AU Coaxial Cable with Molded PL-259 to Motorola Plug

Model No

JBC362H-FM



REPLACEMENT PARTS FOR AM/FM KITS

SSFM- 30" Replacement 17-7 Stainless Steel Antenna

108MM-PL- 9' RG58 Coax Cable; PL-259 to Motorola Plug

Citizen
Band

CB Glass Mount Ant
AM/FM Ant. Kits




STEALTH

Mobile TV Antenna

Patented

- Omni-Directional
- Long Range Reception
- Delivers the Best Performance of any Antenna in its Class
- Available in Mirror Mount or Magnet/Surface Mount
- Available in White or Black
- Can be Painted to Match Vehicle Finish
- 3/8—24 Threaded Antenna Port Built In so another Antenna can be Added
- Kit Includes 12' RG59 Low Loss Cable, Mounting Hardware (*including SD239 for optional Antenna Hook-up*), and Easy Instructions



Mirror Mount



Magnet Mount

Model No:

117—Mirror Mount

117M—Magnet/Surface Mount

117A—Mirror Mount with Amplifier

117AM—Magnet/Surface Mount with Amplifier

Please place a B or W after Desired part Number to Specify Black or White



*Shown With
Optional CB
Antenna*

*Built-In 3/8—
24 Antenna
Port*



Clear Plastic Clamshell Packaging.

*Can Be Hung on a Wall Set or Free
Standing Base for Showcase or Counter
Display*

3DTV OMNIDIRECTIONAL TV ANTENNA

- 3-16" Length 1/4" Diameter Fiberglass Radiating Elements
- Omni-Directional Performance
- Heavy Duty Aluminum Antenna Mounting Nut
- 9' Low Loss RG59 Coax-100% Shielded Coax- F-Connector Termination
- Available in Black [B], White [W], or Red [R]

Model No:

3D-M - Heavy Duty 5" Magnet Mount

3D-MM - 3-Way Deluxe Aluminum Mirror Mount (shown)

3D-WC - Window Clip

Made in the USA



RABBIT EAR TV ANTENNA KITS

- 2-16" Length 1/4" Diameter Fiberglass Elements
- Heavy Duty Aluminum Antenna Mounting Nut
- 9' Low Loss RG59 Coax-100% Shielded Coax- F-Connector Termination
- Available in Black [B], White [W], or Red [R]

Model No

JBCTV-1- Mirror Mount

JBCTV-1M Magnet Mount

JBCTV-1WC- Window Clip

Made in the USA



MTV 2000 MINATURE PORTABLE TV ANTENNAS

- **ProComm's** Exclusive Encapsulated VHF Loading Coil/ UHF Trap
- Unique Black ABS Molded Circuit for TV Reception and 75 OHM Impedance
- 12' *Belden* 75 OHM Low Loss RG59 Cable
- F Connector
- Black Powder Coated Stainless Steel 14" Long Elements

Model No

MTV2-M- Magnet Mount

MTV2-MM- Mirror Mount

MTV2-WC- Window Clip

Made in the USA



MOBILE TV ACCESSORIES

Mobile TV Antenna Amplifier

- 15 dB Gain; 50-900 MHz
- For UHF/VHF/FM

Model No

TV-A15



VHF-UHF Splitter

- 1-75 OHM Input; 2-300 Ohm Output

Model No

TV-SP75



Standard Splitter

- 75-3000 OHM

Model No

SPLITTER



Quality RG59U "F" Connector Cable Assemblies

Model No

803F-3'

806F-6'

812F-12'

825F-25'

850F-50'

8100F-100'



REPLACEMENT TV ACCESSORIES

16" - 1/4" Dia.

Replacement Fiberglass TV Antenna Elements

Model No

TV-RWB- Black

TV-RWW-White

TV-RWR-Red



9' RG59 Cable PL-to-F Connector

Model No

HS9PL-F



Replacement Hub with SO239 Connector

Model No

TV-HUB- Rabbit Ear 2 Element Kit

3D-HUB- 3DTV 3 Element Kit



UHF/
VHF

Mobile TV
Accessories

SPIDER SCANNER BASE STATION ANTENNA



- 30-1200 MHz
- Ideal for ALL Band Scanners:
Low Band, High Band, and UHF Frequencies
- Easy to Assemble and Install
- High Quality Stainless Steel and Chrome Plated Components
- Mounts on 1 1/4-2" Mast Pipe
- Antenna Connection: SO-239
- Available with 50' or 75' of Low Loss Coax Cable
- Available with your Choice of High Quality Connectors

Model No
SP-800- Spider Antenna Only
SP-800/50- Antenna with 50' Cable
SP-800/75- Antenna with 75' Cable
Made in the USA

Replacement Cable For Spider Antennas

Motorola Plug	BNC Connector
HS825M- 25'	HS825BN-25'
HS850M- 50'	HS850BN-50'
HS875M- 75'	HS875BN-75'
HS8100M- 100'	HS8100BN-100'

MOBILE SCANNER ANTENNAS

18" Fiberglass Scanner Antenna

- Fits all Standard 3/8 x 24 Mounts
- 25-960 MHz

Model No
JBC380

18" Stainless Steel Scanner Antenna

- Fits all Standard 3/8 x 24 Mounts
- 25-960 MHz

Model No
JBC180

Kits Available:

3" Magnet Mount

- 3" Chrome Plated Magnet w/Chrome Dome Termination
- 12' RG58 95% Shielded Coax
- Available with BNC (/BN) or Motorola Plug (/M)

Model No
JBC380M3- Fiberglass Antenna Kit
JBC180M3- Stainless Steel Antenna Kit

3-Way Mirror Mount

- Heavy Duty Aluminum Mount
- 9' RG58 95% Shielded Coax
- Available with BNC (/BN) or Motorola Plug (/M)

Model No
JBC380MM- Fiberglass Antenna Kit
JBC180MM- Stainless Steel Antenna Kit

Aluminum Fender Mount

- 9' RG58 95% Shielded Coax
- Available with BNC (/BN) or Motorola Plug (/M)

Model No
JBC380FM- Fiberglass Antenna Kit
JBC180FM- Stainless Steel Antenna Kit

Trunk Lip Mount

- 9' RG58 95% Shielded Coax
- Available with BNC (/BN) or Motorola Plug (/M)

Model No
JBC380TL- Fiberglass Antenna Kit
JBC180TL- Stainless Steel Antenna Kit

DISGUISE SCANNER GLASS MOUNT ANTENNA KIT



- Multiband Receiving Antenna
- Cellular Look Styling
- 22" 17-7 Stainless Steel Whip
- Covers Full Frequency Range: 30-1200 MHz
- Includes 15' Belden RG58/U 95% Coax with Transmission Coupler Box
- Available with your Choice of Connectors: Motorola Plug (/M) or BNC (/BN)

Model No
PC-SGM/M- With Motorola Plug
PC-SGM/BN- With BNC Connector
Made in the USA

Glass Mount Replacement Parts

SGM-RM- Replacement Antenna Mast Only
SGM-RMF- Replacement Antenna Mast and Foot
RMT-KT - Remount Kit includes Double Side Tape and Alcohol Cleaning Pad

MINI MOBILE SCANNER ANTENNAS



- Wide Banded Scanner Antenna- Freq: 25MHz to 1.2GHz
- 18" Black powder Coated Stainless Steel Element
- **ProComm Exclusive** Hermetically Sealed, Waterproof, Molded Circuit
- 12' Belden RG174 Low Loss Cable
- Available with your Choice of Connectors:

Model No
JBC290M- Magnet Mount
JBC290MM- Mirror Mount
JBC290WC- Window Clip
Made in the USA

REPLACEMENT CABLE



12' RG58PL-Motorola Plug
144MMPL

PATENTED CHROME DOME MAGNET MOUNTS

*Field
Repairable!*



5" Heavy Duty Magnet Mount

- Chrome Plated Housing
- Standard 3/8—24 Mounting
- 18' RG58AU 95% Braided Coax
- Molded PL259 Connectors

Model No

JBC115

*Field
Repairable!*



3" Heavy Duty Magnet Mount

- Chrome Plated Housing
- Standard 3/8—24 Mounting
- RG58AU 95% Braided Coax
- Molded PL259 Connectors

Model No

JBC110-12— 12' RG58AU Coax

JBC110-18— 18' RG58AU Coax

JBC110B- 12- Black; 12' RG58AU Coax

JBC110B- 18- Black; 18' RG58AU Coax

PATENTED TERMINATOR SERIES ANTENNA MOUNT KIT

Low-Profile Heavy Duty Surface Mount Kit



- Heavy Duty Roof or Flat Surface Mount
- Dual O-Ring Waterproof Design
- Uses ProComm's Patented Terminator Connector
- High Quality RG58 Cable with Nipple Connector
- NIP-UHF Adapter Included
- Accepts Standard 3/8 x 24 Antennas

Model No

TSM-18— 18' Cable

Terminator Series Replacement Parts



- Replacement Cable for Terminator Antenna
- PL259 to Terminator Stud Mount
- 18' Lengths Only

Model No

HS818T-N Singles RG58

HSDH818T-N- Duals RG58



DHN-38— Chrome Plated Double Hex Nuts

NYS-38— Nylon Step Washers

STR- 38— Aluminum Star Washers

TRUNK MOUNTS

Weatherproof Trunk lip Mount



- For Standard 3/8-24 Antennas
- RG58AU Coax
- Molded PL259 Connectors

Model No

JBC105

JBC105-1 -No Coax



Super Heavy Duty Trunk Mount

- For LARGE Antennas
- 18' Coax and PL259 Connector

Model No

JBC105S/H

HEAVY DUTY FENDER MOUNT KIT



- Heavy Duty Aluminum Fender Mount
- Heavy Duty Chrome Plated Double Hex Nut
- Uses ProComm's Patented Weatherproof Terminator Connector
- High Quality RG58 Cable with Nipple Connector
- NIP-UHF Adapter Included
- Accepts Standard 3/8 x 24 Antennas

Model No

JBC472C- 18' Cable

CABLE ADAPTERS



12SMMPL

- 12" RG58 Cable
- Male Motorola to Male PL259
- Ideal for Prewired Trucks



12MFPL

- 12" RG58 Cable
- Female Motorola to Male PL259
- Ideal for Prewired Trucks



12BNSO

- 12" RG58 Cable
- BNC to SO239 Connector
- To be used with External CB Antenna to Handheld CB Radio



12DMFPL

- 12" RG59 Cable
- Two Female Motorola to Male PL259
- Hooks Up to Dual Prewired Trucks



12MFBN

- 12" RG58 AU Connector
- Motorola Female to BNC Connector
- Allows Existing Motorola-type Antenna System To be converted to Handheld Scanners using BNC Hook-up



**Heavy Duty
Stud
Connector**
JBC900
JBC901 with Lug



**Standard
Non-Corrosive
Brass S0239**
JBC910



**Heavy-Duty
Non-Corrosive
Chrome-Plated
Brass S0239**
JBC910H



**Heavy Duty
FME Stud**
JBC920



**Extra Heavy-Duty
S0239 for BIG
Antenna Systems**
JBC930



**1 1/8" Omni Grip
Mirror Mount**
JBC535 with HD S0239
JBC530 with Stud
JBC531 Mount Only
**1 1/4" Omni Grip
Mirror Mount**
JBC545 with HD S0239
JBC540 with Stud
JBC541 Mount Only



Deluxe 3-Way Mirror Mount
JBC995 with HD S0239
JBC990 with Stud
JBC996 with FME Stud
JBC991 Mount Only



**Heavy Duty Double Groove
Mirror Mount**

JBC995H with HD S0239
JBC990H with Stud
JBC996H with FME Stud
JBC991H Mount Only



**Heavy Duty
Aluminum 3-Way
Mirror Mount with Top
Beehive Mount**
S0-239 for PL-PL
Connections
Add SS for Stainless Steel
JBC993



Slimline Mirror Mount
JBC362 with HD S0239
JBC363 with Stud
JBC365 with FME Stud
JBC361 Mount Only

Heavy Duty Slimline Mirror Mount



JBC362H with HD S0239
JBC363H with Stud
JBC365H with FME Stud
JBC361H Mount Only

**Extra Heavy Duty 3-Way Mirror
Mount for BIG Antenna Systems**



JBC935 Double Groove Mount
with S0239
JBC935H Heavy Duty Double
Groove Mount with S0239

Heavy Duty Bumper Mount



JBC482 with HD S0239
JBC483 with Stud
JBC485 with FME Stud
JBC481 Mount Only

360 ° Adjustable Bar Mirror Mount



JBC592 with HD S0239
JBC593 with Stud
JBC595 with FME Stud
JBC591 Mount Only

STAINLESS STEEL MOUNTS




**Heavy Duty Stainless
Steel Stud
Connector**
JBC900SS



**Super Heavy Duty
Oversized All Stainless
Steel S0239**
Includes Allen Wrench
JBC930SS



**Heavy Duty Deluxe 3 Way
Mirror Mount**
JBC991SS
JBC995SS-with HD S0239



**Stainless Steel Truck/
Fender Mount**
SFM



Stainless Steel Trailer Hitch Mount
SSTH20- Mount Only
SSTH21-with Stud
SSTH25- Heavy Duty S0239
SSTH35- Extra Heavy Duty S0239





180° Adjustable Bar Mirror Mount

JBC492 with HD S0239
JBC493 with Stud
JBC495 with FME Stud
JBC491 Mount Only



6" Standard Flat Bar Mirror Mount

JBC436 with HD S0239
JBC437 with Stud
JBC435 Mount Only



6" Horizontal Mirror Mount

JBC332 with HD S0239
JBC333 with Stud
JBC335 with FME Stud
JBC331 Mount Only

45° Mirror Mounts for Gooseneck Mirrors



JBC462 with HD S0239
JBC463 with Stud
JBC465 with FME Stud
JBC461 Mount Only



Ford Flat Bar Mirror Mount

JBC338 with HD S0239
JBC337 with Stud
JBC336 Mount Only



4" Horizontal Mirror Mount

JBC332S with HD S0239
JBC333S with Stud
JBC335S with FME Stud
JBC331S Mount Only



Quick Release Hinge Mount

JBC830 with HD S0239
JBC831 with Stud
JBC833 Mount Only




Dual Antenna Aluminum Mirror Mount

JBC440 with 2 HD S0239's
JBC441 with 2 Stud's
JBC443 Mount Only



3" Short Heavy Duty Horizontal Mirror Mount

JBC332SH with HD S0239
JBC333SH with Stud
JBC335SH with FME Stud
JBC331SH Mount Only



Quick Release Vise Grip Mount

JBC955 with HD S0239
JBC950 with Stud
JBC951 Mount Only



Heavy Duty Gutter Mount

JBC802 with HD S0239
JBC803 with Stud
JBC801 Mount Only



Standard Fender Mount

JBC472 with HD S0239
JBC473 with Stud
JBC471 Mount Only



Heavy Duty Ball Mount with 3 1/2" Black Mounting Plate and Barrel Spring

JBC986



Heavy Duty Ball Mount with 3 1/2" Black Mounting Plate

JBC985-3 with Lug Connector
JBC985-3P with UHF Connector



Deluxe Two-Sided Mirror Mount

JBC1095 with 2 -HD S0239's
JBC1090 with 2 - Studs
JBC1096 with 2 - FME Studs
JBC1091 Mount Only



Patented Chrome Dome Surface Mount

SM-CD59/BX
SM-CD58K



Heavy Duty Surface Mount Lug Termination

JBC504



Heavy Duty Surface Mount with S0239 and Star Locking Washer

JBC989



MW498

Stud Mount

Patented

- Eliminates the need for Mating SO239/PL-259 Connectors
- All Soldered Connections
- Eliminates Mechanical Losses
- Moisture and Corrosion Resistant Design
- Unlimited power Handling
- Field Serviceable
- Industry Standard 3/8" x 24 Thread Hookup



MW498

Model No.

MW498-75- (Connector Only) for RG58

MW498-76- (Connector Only) for RG59/RG8X

Add **H** for Double Groove

Add **8X** for Low Loss Mini 8

ANTENNA MOUNT ACCESSORIES



Heavy Duty Stainless Steel 5" Spring
JBC404



Medium Duty Stainless Steel 4" Spring
JBC403



Heavy Duty Barrel Spring
JBC305
JBC305SS for Stainless



2 1/2" Medium Duty Spring
JBC303



6" Stainless Steel Mounting Bar For Volvo Trucks
SSR50



Heavy Duty Quick Disconnect with Chrome Plated Brass Body
Stainless Steel Spring & Pin
JBC201L



180° Antenna Swivel
JBC100

Back In Stock!

RADIO MOUNT ACCESSORIES



CB Slide Mounting Bracket Suitable for Most CB Radios
JBC2700



Universal Radio Hump Mount
JBC1000



Standard Adjustable Radio Bracket
2" - 9 1/2"
JBC1200



Adjustable Quick Release Radio Bracket
2" - 9 1/2"
JBC1250



Large Adjustable Radio Bracket
4" - 13" Wide Body Radios
JBC1200L

POWER CORDS



- 2 Pin Molded Plug
- 20 GA CB Power Cord with 2 Amp. Fuse

JBCPC-2



- 2 Pin Molded Plug
- 20 GA Power Cord with 2 Amp. Fuse & Cigarette Lighter Plug

JBCPC-2P



- 3 Pin Molded Plug
- 20 GA Power Cord with 2 Amp. Fuse

JBCPC-3



- 3 Pin Molded Plug
- 20 GA Power Cord with 2 Amp. Fuse & Cigarette Lighter Plug

JBCPC-3P



- 3 Pin Molded Plug
- 16 GA Heavy Duty Power Cord with 3 Amp. Fuse

JBCPC-3H



- 3 Pin Molded Plug
- 16 GA Heavy Duty Power Cord with 3 Amp. Fuse & Cig. Lighter Plug

JBCPC-3PH

RADIO ACCESSORIES



Hook-N-Loop Adhesive
VEL-26-2"x6" Strip
VEL-14-1"x4" Strip



2 Piece Female Cigarette Lighter
Receptacle with Molded Rubber
Strain Reliefs
FCR



JBC-C4—Female 4 Pin Screw On
Mic Connector
JBC-C5—Female 5 Pin Screw On
Mic Connector



3 Piece Male Cigarette Lighter Plug with
Spring Loaded 3 Amp Fuse, Single Ground
Tab & Molded Rubber Strain Relief
MCP



180° 5 Pin Din Mic Connector with
Locking Quick Release
JBC-C5X



Cig. Lighter Male-2 Female Adapter
JBCMCP-2F
Cig. Lighter Male-3 Female Adapter
JBCMCP-3F



Fully Molded Cig. Lighter Male-2 Female "Y"
Adapter
CP01-2CSF
Fully Molded Cig. Lighter Male-3 Female "Y"
Adapter
CP01-3CSF



4MM Plastic Radio Replacement Knobs
JBC4KNP
5MM Plastic Replacement Knobs
JBC5KNP
6MM Plastic Replacement Knobs
JBC6KNP



4MM All Brass Radio Replacement Knobs
JBC4KN
5MM All Brass Replacement Knobs
JBC5KN
6MM All Brass Replacement Knobs
JBC6KN



Magnetic Mic Holder
JBCMHI



3 Finger Mic Holder
JBCMHI2



Adhesive Plastic Mic Holder
JBCMHI3
Glow In The Dark Holder
JBCMHI3G



Plastic Buddy Hook
JBCMHI4
Glow in the Dark
JBCMHI4G



Metal Buddy Hook
JBCMHI5

CONNECTORS



Ultra-Classic Amphenol
PL-259A



Male UHF Crimp for RG-58
PL-259C-58
Male UHF Crimp for RG-59
PL-259C-59
Male UHF Crimp for RG-8X
PL259C-8X



PL-259 Reducer for RG-58
UG-175
PL-259 Reducer for RG-59/RG-8X
UG-176



Field Install PL-259 for RG8U
Installs with Pocket Knife
and Pliers
58FCP



Female UHF Crimp for RG-58
PL-259FC-58
Female UHF Crimp for RG-59
PL-259FC-59



Kalibur PL259 Connector
KPL259 Bakelite Dielectric
KPL259T Teflon Dielectric
KPLS259 Silver/Teflon Dielec-



3" UHF Double Female Bulkhead
UG-363



UHF Double Female Adapter
PL-258



Right Angle Male UHF-Female UHF
UG-644



Female UHF T Adapter
PL-1714



UHF Male-Female T Adapter
PL-1713



Male Motorola Plug
MP-2



UHF Double Male
PL-260



Encapsulating Weather Boot for PL-259
SR-298



BNC Male UHF Female
BNC-44



BNC Male Motorola Female
BNC-26



BNC Male Crimp Connector
BNC-10 For RG58



Slimline Nipple Connector
NIP-58 For RG58
NIP-8X For Mini 8

FME SERIES CONNECTORS



FME-58 Screw on Nipple for RG-58
FME-59 Screw on Nipple for RG-59
FME-8X Screw on Nipple for RG-8X



UHF Female Nipple Adapter
FME-02



Nipple-Male BNC
NIP-11



Nipple-Male UHF
NIP-13

QUALITY "ULTRA CLASSIC" CABLE ASSEMBLIES

- *Belden* Cable
- *Amphenol* and *Kalibur* Connectors Available
- All Hand Soldered Conne-
- 100 % Tested

Made In The USA

RG8X



MINI 8

- Bare Copper Stranded Conductor
 - Foam Dielectric
 - 95% Bare Copper Braid Available in Gray, Black or Clear
 - Plug to Plug or Plug to Lug; Add **L** for Lug
 - Lengths Available at Right
- | |
|-----------------|
| 1-8X.....12" |
| 1.5-8X.....18" |
| 3-8X.....3' |
| 6-8X.....6' |
| 9-8X.....9' |
| 12-8X.....12' |
| 18-8X.....18' |
| 20-8X.....20' |
| 21-8X.....21' |
| 25-8X.....25' |
| 50-8X.....50' |
| 75-8X.....75' |
| 100-8X.....100' |

S8XC



Super Mini 8 with Teflon dielectric PL259's !

- Tinned Copper Stranded Conductor
 - Foam Dielectric
 - 96% Tinned Copper Braid
 - Available in Clear Jacket Only
 - Plug to Plug or Plug to Lug; Add **L** for Lug
 - Lengths Available at Right
- | |
|-------------------|
| 3-S8XC.....3' |
| 6-S8XC.....6' |
| 9-S8XC.....9' |
| 12-S8XC.....12' |
| 18-S8XC.....18' |
| 20-S8XC.....20' |
| 21-S8XC.....21' |
| 25-S8XC.....25' |
| 50-S8XC.....50' |
| 75-S8XC.....75' |
| 100-S8XC.....100' |

SD8XC



Super Dual Mini 8 with Teflon dielectric PL259's !

- *True 75 OHM Impedance*
 - Tinned Copper Stranded Conductor
 - Cellular Foam Polyethylene Dielectric
 - 96% Tinned Copper Braid
 - Available in Clear Jacket Only
 - Lengths Available at Right
- | |
|-----------------|
| Plug- Plug |
| SD8X9.....9' |
| SD8X12.....12' |
| SD8X18.....18' |
| SD8X21.....21' |
| Plug-Lug |
| SD8X9L.....9' |
| SD8X12L.....12' |
| SD8X18L.....18' |
| SD8X21L.....21' |

RG58



RG58

- Bare Copper Stranded Center Conductor
 - Polyethylene Dielectric
 - 95% Bare Copper Braid
 - Available in Black Jacket Only
 - Plug to Plug or Plug to Lug; Add **L** for Lug
 - Lengths Available at Right
- | |
|-----------------|
| 803PL.....3' |
| 806PL.....6' |
| 809PL.....9' |
| 812PL.....12' |
| 818PL.....18' |
| 821PL.....21' |
| 825PL.....25' |
| 850PL.....50' |
| 875PL.....75' |
| 8100PL.....100' |
| 809L.....9' |
| 812L.....12' |
| 818L.....18' |
| 821L.....21' |

RG59



RG59

- Bare Copper Stranded Conductor
 - Foam Polyethylene Dielectric
 - 95% Bare Copper Braid
 - Available in Black Jacket Only
 - Plug to Plug or Plug to Lug
 - Lengths Available at Right
- | |
|---------------|
| PL-PL |
| DH9P.....9' |
| DH12P.....12' |
| DH18P.....18' |
| DH21P.....21' |
| PL-Lug |
| DH9L.....9' |
| DH12L.....12' |
| DH18L.....18' |
| DH21L.....21' |

RG8U



Low Loss RG8U

- Bare Copper Stranded Conductor
 - Foam Dielectric
 - 95% Bare Copper Braid
 - Available in Black, or White
 - Plug to Plug
 - Lengths Available at Right
- | |
|------------------|
| 1RG8U.....12" |
| 1.5RG8U.....18" |
| 3RG8U.....3' |
| 6RG8U.....6' |
| 9RG8U.....9' |
| 12RG8U.....12' |
| 18RG8U.....18' |
| 20RG8U.....20' |
| 21RG8U.....21' |
| 25RG8U.....25' |
| 50RG8U.....50' |
| 75RG8U.....75' |
| 100RG8U.....100' |

STANDARD "HI SPEC" COAX ASSEMBLIES



RG58

- Stranded Coax
 - Molded Plug-Plug PL259's or Plug to Lug; add **L** for Lug
 - Lengths at Right
- | |
|-----------------|
| HS803PL.....3' |
| HS806PL.....6' |
| HS809PL.....9' |
| HS812PL.....12' |
| HS818PL.....18' |
| HS809L.....9' |
| HS812L.....12' |
| HS818L.....18' |
| HS821L.....21' |



RG59

- Dual Coax
 - Molded Plug-Plug PL259's or Plug to Lug; add **L** for Lug
 - Lengths at Right
- | |
|-----------------|
| HSDH9P.....9' |
| HSDH12P.....12' |
| HSDH18P.....18" |
| HSDH9L.....9' |
| HSDH12L.....12' |
| HSDH18L.....18' |



RG8X

- Mini 8 Coax
 - Molded Plug-Plug PL259's or Plug to Lug; add **L** for Lug
 - Lengths at Right
- | |
|------------------|
| HS3-8X.....3' |
| HS6-8X.....6' |
| HS9-8X.....9' |
| HS12-8X.....12' |
| HS18-8X.....18' |
| HS9-8XL.....9' |
| HS12-8XL.....12' |
| HS18-8XL.....18' |



ARMOR FLEX

Ground-Enhancing Low Loss Mini Cable Assemblies

- Unique Double Braid Cable For Maximum Shielding
- Aluminum Magnesium Alloy Exposed Exterior Ground Enhancing Braid To Ensure Optimum SWR and Improved Operation
- Ultra High Quality Super Mini 8 Low Loss Cable For the Best Performance
- 98% Tinned Copper Braid and Tinned Copper Conductor
- All Soldered Kalibur Bakelite PL-259 Connectors

Singles

AF3-3 Foot
AF9- 9 Foot
AF12- 12 Foot
AF18- 18 Foot

Duals

AF9D- 9 Foot
AF12D-12 Foot
AF18D- 18 Foot



QUALITY BULK COAX CABLE FOR "DO-IT-YOURSELFERS"

500 ft. Spools Standard

Special Lengths & Volume Purchases Available

Made in the USA

RG58U95

(Black Jacket)

- 20 Ga. Solid Bare Copper
- Solid Polyethylene— .116
- Bare Copper Braid— 95%
- 50 OHM Impedance

RG58U-500
RG58U-1000

RG58AU95

(Black Jacket)

- 20 Ga. (19x33) Stranded Bare Copper
- Solid Polyethylene— .116
- Bare Copper Braid— 95%
- 50 OHM Impedance

RG58AU-500
RG58AU-1000



RG174

(Black Jacket)

- 26 Ga. (7x34) Stranded Bare Copper
- Solid Polyethylene— .060
- Tinned Copper Braid— 95%
- 50 OHM Impedance

RG174-1000

RG59AU95

(Black Jacket)

- 20 Ga. (19x33) Stranded Bare Copper
- Solid Polyethylene— .116
- Bare Copper Braid— 95%
- 75 OHM Impedance

RG59AU-500
RG59AU-1000

RG8UB

(Black Jacket)

- 13 Ga. (7x21) Stranded Bare Copper
- Solid Polyethylene— .146
- Bare Copper Braid— 95%
- 50 OHM Impedance

RG8UB-500

RG8X Mini 8

(Grey (G), Clear, (C), or Black (B) Jacket)

- 16 Ga. (19x28) Stranded Bare Copper
- Cellular Foam Polyethylene— .155
- Bare Copper Braid— 95%
- 50 OHM Impedance

RG8X-500
RG8X-1000

RG8UW

(White Jacket)

- 13 Ga. (7x21) Stranded Bare Copper
- Cellular Foam Polyethylene— .285
- Bare Copper Braid— 95%
- 50 OHM Impedance

RG8UW-500

S8XC Super Mini 8

(Clear Jacket)

- 16 Ga. (19x28) Stranded Tinned Copper
- Cellular Foam Polyethylene— .155
- Tinned Copper Braid— 96%
- 50 OHM Impedance

S8XC-500
S8XC-1000

RG213

(Black Jacket)

- 13 Ga. (7x21) Stranded Bare Copper
- Solid Polyethylene— .285
- Bare Copper Braid— 95%
- 50 OHM Impedance

RG213-500

SD8XC Super Dual Mini 8

(Clear Jacket)

- 20 Ga. (19x28) Stranded Tinned Copper
- Cellular Foam Polyethylene— .155
- Tinned Copper Braid— 96%
- **True 75 OHM Impedance**

SD8XC-500
SD8XC-1000

Citizen
Band

Bulk
Coax

PCF SERIES HF FIBERGLASS ANTENNA

- Bottom Section: 3/8" Fiberglass with 18 GA. Wire
- Top Section: .125" 17-7 Stainless Steel (Adjustable)
- Power Rated at 500 Watts P.E.P
- Bottom Ferrule is Standard 3/8" x 24 Thread
- Available in Black (B), White (W), Red (R) or Clear (WG)

Model No.	Band	Bandwidth
PCF6	6 Meters	1000 KHz
PCF10	10 Meters	550 KHz
PCF12	12 Meters	300 KHz
PCF15	15 Meters	210 KHz
PCF17	17 Meters	175 KHz
PCF20	20 Meters	150 KHz
PCF30	30 Meters	100 KHz
PCF40	40 Meters	75 KHz
PCF75	75 Meters	40 KHz



MINI HF FIBERGLASS ANTENNA

- First of Its Kind Shortened HF Antennas
- Bottom Section- 3/8" Fiberglass with 20 ga. Wire
- Top Section- .100 17-7 Stainless Steel Tip (Adjustable)
- Power Rating 350 Watts

Model No.	Band	Bandwidth
CS6	6 Meters	800 KHz
CS10	10 Meters	175 KHz
CS12	12 Meters	140 KHz
CS15	15 Meters	110 KHz
CS17	17 Meters	95 KHz
CS20	20 Meters	80 KHz
CS30	30 Meters	100 KHz
CS40	40 Meters	40 KHz
CS75	75 Meters	36 KHz

PC Series

5/8 Wave 3db Gain VHF Antenna

- 5/16" Dia. Fiberglass Base
- 16 Ga. Copper Wire
- 17-7 Stainless Steel Whip
- 350 Watt Rated

Model No

PC144— 144-149 MHz

PC150— 150-160 MHz

PC220— 220-225 MHz

* Made in the USA*

SS-FM20

Stainless Steel Antenna

- 20" 17-7 Stainless Steel VHF Quarterwave Antenna
- 3/8" x 24 Thread Ferrule

Model No

SS-FM20

CD144M

2 Meter Magnet Mount Antenna Kit

- SS-FM20 Stainless Steel Antenna
- 3" Chrome Magnet Mount
- 12' RG58 Cable with PL259 or BNC Connector

Model No

CD144M

Add /BN for BNC Connector

PC144M

Combo Kit

Includes 2 Antenna Systems for Optimum
Performance and Flexibility

- 1 SS-FM20 Stainless Steel Antenna
- 1— PC144 5/8 Wave Fiberglass Base Antenna
- 3" Chrome Dome Magnet Mount
- 12' Low Loss Cable with PL259 or BNC Connector

Model No

PC144M

QUARTERWAVE ANTENNAS



- Durable 17-7 .100 Dia Stainless Steel Element
- Long Lasting Black Powder Coating
- Black ABS Plastic Housing
- NMO Style Mounting
- Moisture Seal Internal O ring
- Stainless Steel Contact Spring
- Soldered Gold Contact Plate

VHF Frequency:
118-225 MHz

UHF Frequency:
118-806 Mhz

Model No.	Freq.	Model No.	Freq.
PCQ1 (Field Tunable)	118-960	PCQ1 (Field Tunable)	118-960
PCV136	136-144	PCU406	406-420
PCV144	144-152	PCU420	420-435
PCV152	152-162	PCU435	435-450
PCV162	162-174	PCU450	450-470
PCV220	220-225	PCU470	470-490
		PCU490	490-512
		PCU800	800-806

NMO MOUNTING KITS AVAILABLE:

Includes Cable and PL259 Connector



NMO 3-Way Mirror Mount
CTMM/PL



NMO Surface Mount
MSM/PL



NMO Low Profile Fender Mount
SFM/PL



NMO High Profile Fender Mount
CFM/PL



3" NMO Magnet Mount
CMAG/PL



NMO Trunk Mount
TLM/PL



PC SERIES Dual Band Magnet Mount Kits

- Mast Components: .100" 17-7 Stainless Steel
- All Brass Phase Shifting Components
- Hermetically Sealed
- 14 Ga. Steel Magnet Cup 2 3/8" dia.
- Black Powder Coated
- Includes Cable and PL259 Connector

Model No.

144/440 MHz 2 Meter- 70cm

PC144-440

150-158 / 461-470 MHz Business Bands

PC150-461

Add /BN to Model No. for BNC Connector

Made In The USA

DUAL BAND MICROTECH ANTENNA

- 2 Meter, 70 cm Magnet Kit
- 144-148 and 440-450 MHz
- 1- 1/8" Dia. Black ABS Base with Rare Earth Magnet; Black Stainless Steel Whip
- Includes 12' RG174 Cable with BNC Connector
- Max Power: 50 Watts (2M)
25 Watts (70cm)

Model No.

MT144-440



TRI MAG

Ultra Heavy Duty Triple Magnet Mount

- 3- 5" Magnets on Heavy Aluminum Frame for Super Stability!
- 3/8" - 24 Thread Dome Stud
- 18' RG58 Low Loss Cable with PL259 Connector

Model No.

PCTM5

As Above Except with NMO Antenna Mount

PCTM5NMO



QUAD MAG

Ultra Heavy Duty Quadruple Magnet

- 4- 5" Magnets on Heavy Aluminum Frame for Super Stability!
- 3/8" - 24 Thread Dome Stud
- 18' RG58 Low Loss Cable with PL259 Connector

Model No.

PCTM54

As Above Except with NMO Antenna Mount

PCTM54NMO



PREMIUM^{SERIES} MICROPHONES



- High Sensitivity Microphone Cartridge
- Ergonomic Hand Contour Design
- Blue LED Operation Indicator
- Textured ABS Plastic Housing and Thumb Lever
- Contoured Black Mesh Microphone Grill
- 9' Heavy Duty Mil Spec Microphone Cord with Strain Relief
- High Quality Chrome Plated 4 or 5 Pin Microphone Connector
- Hand Assembled and Tested

Model No.

PSM4— 4 Pin Dynamic

PSM4NC— 4 Pin Noise Canceling Mic

PSM4PM— 4 Pin Power

PSM5— 5 Pin Dynamic

PSM5NC— 5 Pin Noise Canceling

PSM5PM— 5 Pin Power Mic

SPEAKERS



- 4" - 8 OHM 10 Watt External Speaker
- 10' Cord
- 3.55MM Plug
- Swivel Mounting Base

JBCSP-1



- 4" - 8 OHM 10 Watt External Speaker
- Noise Canceling
- 10' Cord
- 3.55MM Plug
- Swivel Mounting Base

JBCSP-2



- 4" - 8 OHM 10 Watt External Speaker
- P.A. Talk Back & Noise Canceling
- 10' Cord
- 3.55MM Plug
- Swivel Mounting Base

JBCSP-3



- 2 1/4" - 8 OHM 5 Watt External Speaker
- 6' Cord
- 3.55MM Plug
- Includes Sun Visor Clip and Dashboard Mount Bracket

JBCSP-4



- 2 1/4" - 8 OHM 5 Watt Weatherproof External Speaker
- 6' Cord
- 3.55MM Plug
- Swivel Mounting Bracket

JBCSP-5



- 8 OHM Surface Mount External Speaker
- **Only 1 1/2" Diameter!**
- Housing Rotates 360° for optimum Performance
- Complete with Mounting Hardware

JBCSP-6



- Attractive Wedge Style External Speaker
- Weatherproof 8 OHM Impedance
- Complete with Mounting Hardware

JBCSP-8



- 5" Marine Style
- White Enamel Weatherproof
- Indoor/Outdoor
- 15 Watt Rating

JBCPA-5W

NOISE CLIPPER

Improves the dynamic range of CB or Amateur Radio! Amplifies the signal and reduces the noise!

The NOISE CLIPPER.....
Because don't you already have
enough static in your life!!!!!!

JBCNR400





CELLULAR DUAL BAND MOBILE ANTENNAS

- **Dual Band— 800 and 1900 MHz Cellular Digital and Analog Phones**
- Durable ABS Molded Dual Phase Shift PCS/Cellular Whip
- Low Profile Coupler Box for Glass Mount
- Magnet Mount and Window Clip uses ProComm's Mini RG174 Low Loss Coaxial Cable
- To Specify Connector Type Add to Model No- **/TN** for TNC, **/LTN** for Loose TNC, **/MU** for Mini UHF, **/LMU** for Loose Mini UHF, **/NIP** for Slimline Nipple, **/EZ** for EZ Kit

Operating Frequencies:

Cellular 829-896 MHz. 5dB Gain

PCS 1700-1900 MHz 3dB Gain

Model No

DB35GM— Glass Mount Cellular Antenna Kit

DB35M— Magnet Mount Cellular Antenna Kit

DB35WC— Window Clip Cellular Antenna Kit

DB35SM— Surface Mount Cellular Antenna Kit

ANT-DB35— Surface Mount Antenna Only

Made In The USA

Replacement Parts


RM-DB35GM— Replacement Mast for Glass Mount

RM-DB35M— Replacement Mast for Magnet Mount

RM-DB35A— Replacement Mast for Surface Mount



ANT-DB35

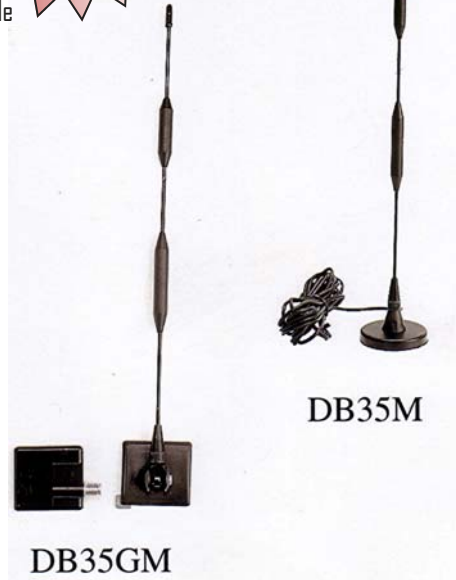

DB35M

DB35GM



MULTIBAND TRUCKER ANTENNA

- **Dual Band— 800 and 1900 MHz Cellular Digital and Analog Phones**
- Advanced Printed Circuit Board Technology
- Tuned Ground Plane Radials for Optimum Cellular Reception
- 12' of High Spec Low Loss RG174 Cable with Nipple Connector for Superior Cellular Performance
- Fits Standard 3/8-24 Mounts

Operating Frequencies:

Cellular— 824-896 MHz.

PCS— 1700-1900 MHz

Model No

CT400— 24" Cellular Trucker Antenna

Made In The USA



GLASS MOUNT CELLULAR ANTENNAS

Frequency: 824-896 Mhz

- High Quality Black Powder Coating for Long Lasting Finish
- .100 Stainless Steel Elements for Durability
- Superior SWR— <1.5:1
- Euro-Style Design
- Also Available for 896-960 MHz
- **Every Kit Includes:**


RG58 Stranded Conductor 96% Braid Cable
Your Choice of Connector:
Chrome TNC w/Molded Strain Relief
Slimline Nipple Connector
Chrome Mini UHF w/Molded Strain Relief
EZ Kit: Nipple Connector w/both TNC and MU Adapters

3db

Open Coil Antenna Kit

- 3 db Open Coil Whip with Base
- Antenna Coupler Box
- 15' *Belden* Cable Assembly with Connectors
- Alcohol Cleaning Swab

PCGM-3

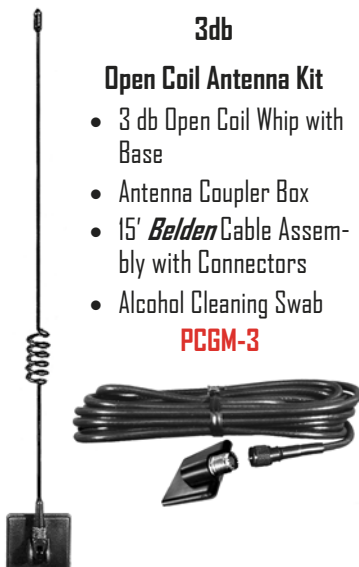

5db

Whistle Free Antenna Kit

- 5 db Whistle Free Whip with Base
- Antenna Coupler Box
- 15' *Belden* Cable Assembly with Connectors
- Alcohol Cleaning Swab

PCGM-5



7db Hi Performance

Antenna Kit

- 7db Hi Performance Whip with Base
- Antenna Coupler Box
- 15' *Belden* Cable Assembly with Connectors
- Alcohol Cleaning Swab

PCGM-7



To Specify Connector Type:

Add To Model No:

/TN for TNC; **/LTN** for Loose TNC
/MU for Mini UHF; **/LMU** for Loose Mini UHF
/NIP for Slimline Nipple; **/EZ** for EZ Kit

ECONO-GLASS ANTENNAS

- 3db Open Coil Antenna
- Antenna Coupler Box
- 12' Coax with Connectors
- Alcohol Swab

GM-3



- 5db Closed Coil Antenna
- Antenna Coupler Box
- 12' Coax with Connectors
- Alcohol Swab

GM-5



Made In The USA

PC SERIES GLASS MOUNT REPLACEMENT PARTS

Glass Mount Replacement Mast

For All Styles of **ProComm** Series
Glass Mount Antennas

Model No

RM-14— Unity Gain

RM-3— 3db

RM-5— 5db

RM-7— 7db



Replacement Mast and Base

For All Styles of **ProComm** Series
Glass Mount Antennas

Model No

RFM-14— Unity Gain

RFM-3— 3db

RFM-5— 5db

RFM-7— 7db



Base Only

Replacement Base For All Styles of
ProComm Series Glass Mount
Antennas

Model No

RF



Glass Mount Coupler Box

For All Styles of **ProComm** Series
Glass Mount Antennas

Model No

RCB

RCB-DB



**Double-Sided
Tape**

**Alcohol
Wipe**

Adhesive Remount Kit

For All Styles of **ProComm** Series

Model No

RMT-KT

MOUNTING ACCESSORIES

All Brass NMD Mount



- Gold Plated Contact
- Soldered Ground Lug
- Black Plastic Protective Cap

Model No

MOT034— Standard Design

MOT038— 3/8" Thick Plate Design



3 Way Aluminum Mirror Mount

Model No.

JBC991



Stainless Steel Truck/Fender Mount

Model No.

SFM

INSTALLATION CABLE HARNESS

Made In The USA

15' **Belden** Low Loss
RG58 Stranded Conductor
96% Braid Cable
Your Choice of Connectors

TNC-Mini UHF Connectors

15' TNC/MU



Mini UHF-Mini UHF Connectors

15' MU/MU



MU-Butt Cut Connectors

15' MU



Kit Contains Nipple Connector
with Both TNC & MU Adapters

15' EZ



Call **ProComm** for ALL your Custom Cable
Assembly Needs!



MULTIBAND SUCTION CUP ANTENNA



- Attaches to Inside Vehicle Window
- Voltage Fed, Dual Band Cellular/PCS
- ProComm's Exclusive Low Loss RG174 Cable
- Available with Right Angle Nokia, TNC or Nipple Connector
- Slim Line Design for Easy Transportation
- Only 5" Overall Height
- Doubles the Signal Strength
- Easy Release Suction Cups
- Versatile Mounting on all Glass Surfaces

Model No.

MB-SC2

Made in the USA

Available with Your Choice of Connectors:

TNC, MUHF, NIP, or NK

Model #: **MB-SC2/TN, MU, NIP, or NK**

Frequency:

Cellular:

PCS:

824-896 MHz

1.7-1.99 GHz

Gain: 3dB

Impedance: 50 Ohm

Height: 5" Overall

Whip: 17-7 Stainless Steel

Cable: 8' Low Loss RG174

Connector: Right Angle Nokia (NK), TNC (/TN), Nipple (NIP), or MU (/MU)

MULTIBAND MINI-MAG ANTENNAS



- 25 Watts Power
- Unity Gain
- 50 OHM Impedance
- 17-7 Stainless Steel Whip
- With 10' RG174U Cable

Frequency:

Cellular:

PCS:

824-960 MHz

1.7-1.99 GHz

Made In The USA

Available with Your Choice of Connectors:

TNC, MUHF, or NIP

Model #: **MB-MM2/TN, MU, NIP, SMA, or SMB**

ECM SERIES MAGNET MOUNT ANTENNA

Frequency: 824-896 Mhz

- 2 1/2" Mini Magnet Mount with No Scratch Protective Base
- 12' Low Loss **ProComm** RG58/AU— 96% Coax
- **ProComm's Exclusive** Molded Weatherproof Base Circuit
- Quality Factory Terminated Connectors

To Specify Connector Type:

Add After Model Number:

/TN for TNC; **/MU** For Mini UHF;
/NIP for Slimline Nipple; **/EZ** for EZ
Kit



ECM-14
Unity Gain
Antenna

ECM-3
3 db
Open
Coil
Antenna

ECM-5
5 db
Whistle
Free
Antenna

ECM-7
7 db
Hi
Performance
Antenna

SURFACE MOUNT ANTENNAS

Frequency: 824-896 Mhz

- Quality 17-7 .100 Diameter Stainless Steel Elements
- Black Powder Coating Finish
- All Soldered Terminations
- NMO Style Mounting with Spring Contact
- Corrosion Resistant— Brass Threaded Contact Pin

To Specify Connector Type:

Add After Model Number:

/TN for TNC; /MU For Mini UHF;

/NIP for Slimline Nipple; /EZ for EZ Kit



ANT-14
Freq: 824-896 MHz
VSWR: < 1:1.5
Height: 5"



ANT-3
Freq: 824-896 MHz
VSWR: < 1:1.5
Height: 14"



ANT-5
Freq: 824-896 MHz
VSWR: < 1:1.5
Height: 14 3/4"



ANT-7
Freq: 824-896 MHz
VSWR: < 1:1.5
Height: 20 1/2"



EF-3
Freq: 824-896 MHz
VSWR: < 1:1.5
Height: 20"

KITS AVAILABLE:



CMAG Series Deluxe Magnet Mount Kit

- 3" Low Profile Magnet Mount
- All Brass NMO Mount w/Gold Contact Pin
- 15' Low Loss *Belden* RG58/AU 96% Coax
- No Scratch protective Base
- Durable Black Finish

Model No
CMAG- Mount Only
CMAG-14- Unity Kit
CMAG-3- 3db Kit
CMAG-5- 5db Kit
CMAG-7- 7db Kit
CMAG-EF- 3db Elv. Kit



CTMM Series Mirror Mount Kit

- 3 Way Aluminum Mirror Mount
- All Brass NMO Mount w/Gold Contact Pin
- 12' Low Loss *Belden* RG58/AU 96% Coax

Model No
CTMM- Mount Only
CTMM-3- 3db Kit
CTMM-5- 5db Kit
CTMM-7- 7db Kit
CTMM-EF- 3db Elv. Kit



TLM Series Trunk Mount Kit

- Low Profile Trunk Mount
- All Brass NMO Mount w/Gold Contact Pin
- 18' Low Loss *Belden* RG58/AU 96% Coax

Model No
TLM- Mount Only
TLM-3- 3db Kit
TLM-5- 5db Kit
TLM-7- 7db Kit
TLM-EF- 3db Elv. Kit



CFM Series High Profile Fender Mount Kit

- Aluminum Fender Mount
- All Brass NMO Mount w/Gold Contact Pin
- 12' Low Loss *Belden* RG58/AU 96% Coax

Model No
CFM- Mount Only
CFM-3- 3db Kit
CFM-5- 5db Kit
CFM-7- 7db Kit
CFM-EF- 3db Elv. Kit



SFM Series Low Profile Fender Mount Kit

- Stainless Steel 90° Fender Mount
- All Brass NMO Mount w/Gold Contact Pin
- 12' Low Loss *Belden* RG58/AU 96% Coax

Model No
SFM- Mount Only
SFM-3- 3db Kit
SFM-5- 5db Kit
SFM-7- 7db Kit
SFM-EF- 3db Elv. Kit



MSM Series Surface Mount Kit

- All Brass NMO Surface Mount w/Gold Contact Pin
- Available w/15' or 18' Low Loss *Belden* RG58/AU— 96% Coax
- Protective Plastic Cap
- Available for 3/8" Thick Plate Design (/38)

MSM-15 15' Cable
MSM- Mount Only
MSM-14- Unity Kit
MSM-3- 3db Kit
MSM-5- 5db Kit
MSM-7- 7db Kit
MSM-EF- 3db Elv. Kit

MSM-18 18' Cable
MSM/18-14- Unity Kit
MSM/18-3- 3db Kit
MSM/18-5- 5db Kit
MSM/18-7- 7db Kit
MSM/18-EF- 3db Elv. Kit

WINDOW CLIP ANTENNAS

Frequency: 824-896 Mhz

- Stainless Steel Elements with Black Powder Coated Finish
- Soldered Antenna Terminations
- Black Anodized Aluminum Window Bracket
- Weatherproof Molded Circuit
- Soldered Circuit Terminations
- 12' Low Loss RG174 Coax Cable
- Protective Vinyl Pad

Made In The USA

To Specify Connector Type:

Add To Model No:

/TN for TNC; **/LTN** for Loose TNC

/MU for Mini UHF; **/LMU** for Loose Mini UHF

/NIP for Slimline Nipple; **/EZ** for EZ Kit



PC-WC3



PC-WC5



PC-WC14


YAGI ANTENNAS

- Frequency: 806-896 MHz
- VSWR: < 1.5 : 1
- 300 Watts Maximum Power
- 50 Ohms Input Impedance
- Sturdy, Durable Aluminum
- 12' Low Loss RG174 Coax Cable
- Protective Vinyl Pad

Y850-4- 4 Element 9dB Gain

Y850-8- 8 Element 12dB Gain

For Black **/B**, For White **/W**

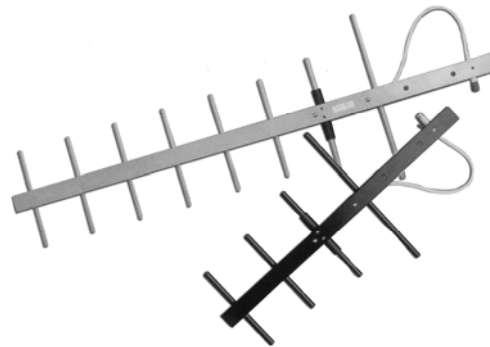

POWER PRODUCTS



Double Female Y Cord Adapter

CPDI-2CSF

Triple Female Y Cord Adapter

CPDI-3CSF



2 Piece Female Cigarette
Lighter Receptacle

FCR



3 Piece Male Cigarette Lighter Plug
with 3 Amp Fuse

MCP

PHONE MOUNTS

Flex Mounts

Supports Up to 7 lbs.

Complete w/all Hardware and Metal Plate

Made In The USA



5FM- 5"

7FM- 7"

9FM- 9"

11FM- 11"

13FM- 13"

15FM- 15"

23FM- 23"

27FM- 27"

TNC CONNECTORS



TNC Female for NEC Cellular
Phones
TNC-3



TNC Male Crimp For Proflex
TNC-8

TNC Male Crimp For RG58
TNC-10
TNC Male Crimp For *Belden 9913*
TNC-9913C



TNC Female Bulkhead for RG58
TNC-11



TNC Female Crimp for RG58
TNC-15



TNC Male Right Angle Crimp for
RG58
TNC-16



TNC Double Female
TNC-33



TNC Male-TNC Female Right Angle
TNC-35



TNC "T" Connector
TNC-38



TNC Male- UHF Female
TNC-45



TNC Male- BNC Female
TNC-46



TNC Push-On Male Crimp for RG58
TNC-66



Push-On Male TNC Connector
TNC-77



TNC Female Crimp for RG174
TNC-174F



TNC Male Crimp for RG174
TNC-174M

MINI UHF CONNECTORS



Male UHF Female Crimp for
RG58
MPL-01

Mini UHF Female Crimp for RG59
MPL-01-59



Mini UHF Male Crimp for RG58
MPL-03IP
Mini UHF Male Crimp for RG58
(Black)
MPL-03B



Mini UHF Female Bulkhead
MPL-04



Mini UHF Double Female
MPL-06



Mini UHF Male-Mini UHF Female
Right Angle
MPL-08



Mini UHF Male-UHF Female
MPL-12



Mini UHF Male-TNC Female
MPL-14



Mini UHF Female-UHF Male
MPL-16



Mini UHF Female-TNC Male
MPL-18



Push-On Male Mini UHF Crimp for
RG58
MPL-66



Mini UHF Male Crimp for RG174
MPL-174

NIPPLE CONNECTORS



Nipple- Mini UHF Female
NIP-5



Nipple-N Male
NIP-9



Nipple- Mini UHF Male
NIP-10



Nipple-Male BNC
NIP-11



Nipple-Male TNC
NIP-12



Nipple-Male UHF
NIP-13



Rotatable Nipple for RG58
NIP-58



Rotatable Nipple for RG59
NIP-59




Rotatable Nipple for RG8X
NIP-8X



Rotatable Nipple For RG174
NIP-174


BNC CONNECTORS

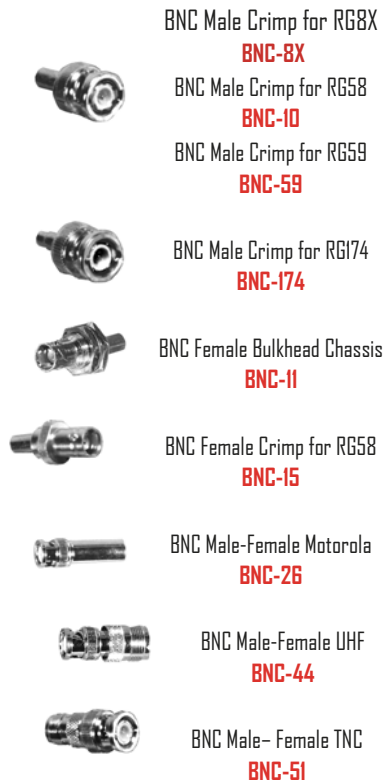

N-CONNECTORS



SMA SERIES

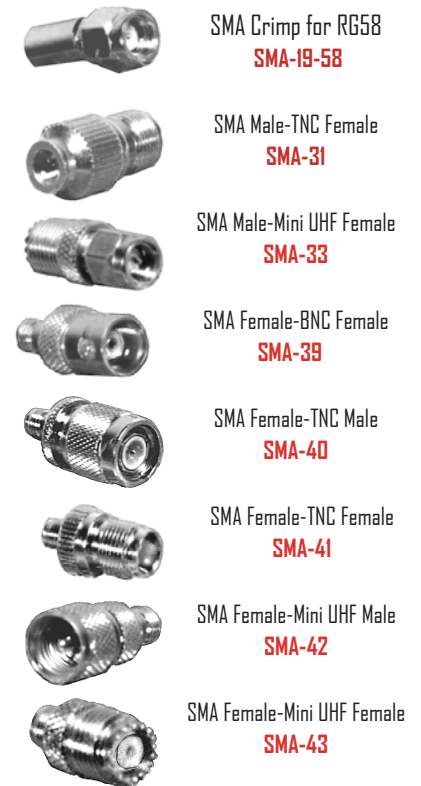

STRAIN RELIEFS



TERMS AND CONDITIONS

BACK ORDERS

ProComm strives to ship all orders as soon as possible. **Any back orders totaling less than \$100.00 will be cancelled.** If back order is caused by vendor material shortage, the back order will be cancelled and you will be notified.

DELIVERY

Our normal shipping time is within one week after we receive your order (holidays and weekends excluded). Sometimes, however, material shortages or specially assembled or custom products can cause unscheduled delays.

FREIGHT POLICY

All orders are shipped FOB Onarga, Illinois. Freight will be charged on all invoices. **If order is \$1500.00 or more and paid within terms,** freight may be deducted.

RETURNS

No returns will be accepted without prior factory approval. Return items must be shipped to us **freight prepaid.** All non-defective products will be returned to customer, or customer will be **charged a 25% restocking fee.**

PAYMENT TERMS

Credit terms— net 30 days from shipment date— are available to approved accounts. Call us to request a credit application. We also accept Visa, MasterCard, American Express, or C.O.D.

PRICE CHANGES

Prices and specifications are subject to change without notice. ProComm reserves the right to correct typographical errors on all price sheets, sales flyers, and catalog sheets.

All prices are stated in United States currency.

MINIMUM ORDER

Orders will be accepted for minimum of \$100.00 only.

DAMAGES

All merchandise leaves our plant in perfect condition. If damaged, claims should be filed by BUYER against CARRIER within 10 days of invoice.

WARRANTY

All ProComm products are warranted against defective workmanship and material if failure results from these factors with one (1) year of purchase. ProComm does not assume any liabilities for any incidental or consequential damages of any kind, and our liability shall not exceed the original price of that product. Warranty does not cover misuse or abuse of any product.



209 West Grant * Onarga, IL 60955
Toll Free Order # 877-331-5161
815-268-4303 or FAX 815-268-4313
www.procommproducts.com